



**Prioritätsbescheinigung über die Einreichung  
einer Patentanmeldung**

**Aktenzeichen:** 101 39 339.3

**Anmeldetag:** 10. August 2001

**Anmelder/Inhaber:** Wittur AG, Wiedenzhausen/DE

**Bezeichnung:** Getriebeloser Seilaufzug

**Priorität:** 04.01.2001 DE 101 00 707.8

**IPC:** B 66 B 11/08

Die angehefteten Stücke sind eine richtige und genaue Wiedergabe der ursprünglichen Unterlagen dieser Patentanmeldung.

München, den 6. Februar 2002  
Deutsches Patent- und Markenamt  
Der Präsident  
Im Auftrag


A handwritten signature in black ink, appearing to read 'AGURKS', written over the printed name 'AGURKS'.

AGURKS

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup> :</b>  <b>B66B 11/00, 11/08</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/27739</b>  <b>(43) International Publication Date:</b> 18 May 2000 (18.05.00)
<b>(21) International Application Number:</b> PCT/FI99/00913  <b>(22) International Filing Date:</b> 2 November 1999 (02.11.99)  <b>(30) Priority Data:</b> 982403                      5 November 1998 (05.11.98)      FI  <b>(71) Applicant (for all designated States except US):</b> KONE CORPORATION [FI/FI]; Kartanontie 1, FIN-00330 Helsinki (FI).  <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> FALETTI, Luciano [IT/IT]; Largo Ungaretti 3-46, I-20020 Arese (IT).  <b>(74) Agent:</b> KONE CORPORATION; Patent Dept., P.O. Box 677, FIN-05801 Hyvinkää (FI).		<b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.          Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
<b>(54) Title:</b> TRACTION SHEAVE ELEVATOR  <b>(57) Abstract</b>  The invention relates to a traction sheave elevator. The elevator car (2) has been arranged to move along guide track (A) in an elevator shaft (1). The counterweight (3) has been arranged to move along guide track (B) in the elevator shaft (1). Both ends of rope (4) are attached to a fixed overhead structure (5). The elevator car and the counterweight are supported by the rope. The rope (4) is passed via a number of rope pulleys (6-14), one of which is the traction sheave while the others are diverting pulleys. Rope pulleys are connected to the counterweight (3), to the fixed overhead structure (5) in the upper part of the elevator shaft and to the elevator car (2). The elevator car is provided with a first pair of car rope pulleys (6, 7) placed at a distance from each other. The traction motor (15) has been arranged to drive one of the rope pulleys, which is the traction sheave. Connected to the elevator car is a second pair of car rope pulleys (9, 10), in which the car rope pulleys (9 and 10) are at a distance from each other. An auxiliary rope pulley (11) is connected to the fixed overhead structure (5). The rope (4) is passed from a car rope pulley (7) of the first pair of car rope pulleys (6, 7) via the auxiliary rope pulley (11) mounted on the fixed overhead structure to a car rope pulley (10) of the second pair of car rope pulleys (9, 10).		

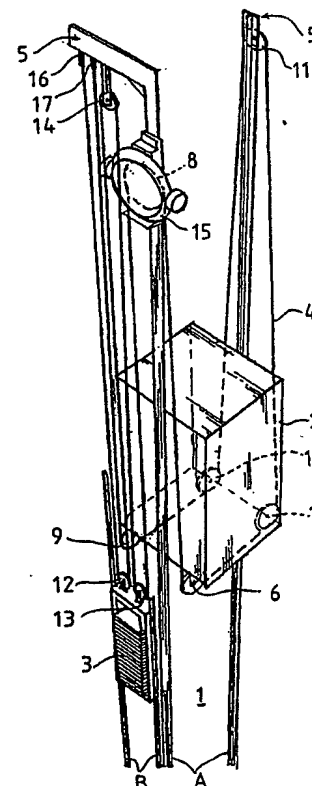

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/HF 99/00913

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 7 B66B11/00 B66B11/08		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC 7 B66B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DE 297 04 886 U (BOLL RAINER) 15 May 1997 (1997-05-15) the whole document	1-10
Y	EP 0 588 364 A (KONE ELEVATOR GMBH) 23 March 1994 (1994-03-23) column 1, line 51 -column 2, line 41; figures 1-3	1-10
Y	US 3 101 130 A (BIANCA E G) 20 August 1963 (1963-08-20) figure 1	6
Y	WO 96 09978 A (KONE OY) 4 April 1996 (1996-04-04) the whole document	9,10
-/--		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
Date of the actual completion of the international search  10 March 2000		Date of mailing of the international search report  19. 04. 2000
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 eponl, Fax: (+31-70) 340-3016		Authorized officer  Maiana Eddin/AB

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/FI 99/00913

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	WO 99 43595 A (OTIS ELEVATOR CO) 2 September 1999 (1999-09-02) the whole document	1-8
P,Y	---	9,10
A	DE 10 32 496 B (TEPPER J) 19 June 1958 (1958-06-19) figures 1,2 -----	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/FI 99/00913

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 29704886	U	15-05-1997	EP 0866018 A	23-09-1998
EP 588364	A	23-03-1994	FI 924207 A	19-03-1994
			AT 138891 T	15-06-1996
			AU 660110 B	08-06-1995
			AU 4735993 A	31-03-1994
			BR 9303814 A	05-04-1994
			CA 2106436 A,C	19-03-1994
			CN 1086786 A,B	18-05-1994
			DE 69302978 D	11-07-1996
			DE 69302978 T	10-10-1996
			DK 588364 T	05-08-1996
			ES 2089663 T	01-10-1996
			JP 6206677 A	26-07-1994
			US 5351788 A	04-10-1994
US 3101130	A	20-08-1963	NONE	
WO 9609978	A	04-04-1996	FI 944475 A	28-03-1996
			AT 179954 T	15-05-1999
			AU 681814 B	04-09-1997
			AU 3569495 A	19-04-1996
			BR 9509089 A	14-07-1998
			CA 2199966 A	04-04-1996
			CN 1159174 A,B	10-09-1997
			CZ 9700892 A	18-03-1998
			DE 69509666 D	17-06-1999
			DE 69509666 T	16-09-1999
			DE 783452 T	28-05-1998
			EP 0783452 A	16-07-1997
			ES 2131856 T	01-08-1999
			GR 3030681 T	30-11-1999
			JP 10506871 T	07-07-1998
			SI 783452 T	31-08-1999
			US 5878847 A	09-03-1999
WO 9943595	A	02-09-1999	CN 1234362 A	10-11-1999
			CN 1229764 A	29-09-1999
			WO 9943592 A	02-09-1999
			WO 9943591 A	02-09-1999
			WO 9943590 A	02-09-1999
			WO 9943589 A	02-09-1999
			WO 9943600 A	02-09-1999
			WO 9943602 A	02-09-1999
			WO 9943593 A	02-09-1999
			WO 9943601 A	02-09-1999
			WO 9943599 A	02-09-1999
			WO 9943885 A	02-09-1999
			WO 9943596 A	02-09-1999
			WO 9943598 A	02-09-1999
			WO 9943597 A	02-09-1999
DE 1032496	B		NONE	

## TRACTION SHEAVE ELEVATOR

The present invention relates to a traction sheave elevator as defined in the preamble of claim 1.

5

In prior art, specifications DE-U-29704886 and EP-A2-0631967 present elevators in which the elevator car and the counterweight have been arranged to move along a guide track in an elevator shaft. Both ends of the elevator rope are attached to a fixed structure and the elevator car and counterweight are carried by the rope. The rope is passed over rope pulleys. The traction sheave is driven by a traction motor. Rope pulleys are mounted on the counterweight, on a fixed overhead structure and on the elevator car. The basal structures of the elevator car are provided with a pair of rope pulleys and the rope is passed via this pair of pulleys so that it goes once under the car and the elevator car is thus supported by the rope.

20

Since the aim is to place the elevator car in a centric fashion in the car frame or an equivalent supporting structure if possible and to place the car guides leaning against the guide rail as close as possible to a plane intersecting the centre line or centre of gravity of the elevator car, it is difficult to achieve a centric supporting effect on the car or car frame of rope suspension with ropes passing under the elevator car. When the rope runs via a single pair of rope pulleys attached to the elevator car, the load is applied via the rope pulley suspension to only one line passing under the car. Furthermore, suspending the car on a single pair of rope pulleys, especially in the case of freight elevators used to transport heavy loads, leads to a necessity to use thick ropes and rope pulleys with a large diameter.

35

The object of the present invention is to eliminate the drawbacks described above

A specific object of the present invention is to disclose a traction sheave elevator in which the load applied via rope suspension can be distributed over a larger area in the elevator car structure than before. Another object of the invention is to provide a possibility to implement a rope-driven freight elevator without machine room to replace conventional hydraulic freight elevators. A further object of the invention is to disclose an arrangement that enables a lighter elevator car structure to be achieved.

The traction sheave elevator of the invention is characterised by what is presented in claim 1.

According to the invention, the traction sheave elevator comprises a second pair of car rope pulleys connected to the elevator car, in which the car rope pulleys are placed at a distance from each other, and an auxiliary rope pulley mounted on a fixed overhead structure in the building. The rope is passed from a car rope pulley in a first pair of car rope pulleys to the auxiliary rope pulley mounted on a fixed overhead structure and further to a car rope pulley in the second pair of car rope pulleys.

The invention has the advantage that as the elevator car is provided with at least four pulleys placed at a distance from each other over which the rope passes twice, going over the auxiliary rope pulley in between, the load is distributed over a large area in the elevator car. The elevator car can be built using a lighter and less rigid structure than in earlier elevators. Moreover, the invention discloses an elevator capable of hoisting relatively heavy loads using a motor that



has a relatively low power rating and is therefore small.

In an embodiment of the elevator, the second pair of  
5 car rope pulleys is at a distance from the first pair  
of car rope pulleys so that the rope portion passing  
via the first pair of car rope pulleys is substantially  
parallel to the rope portion passing via the second  
pair of car rope pulleys. The car rope pulleys are dis-  
10 posed in a rectangular configuration.

In an embodiment of the elevator, the first pair of car  
rope pulleys and the second pair of car rope pulleys  
are symmetrically disposed on either side of the centre  
15 line of the elevator car, thus producing a balanced  
structure.

In an embodiment of the elevator, the counterweight is  
provided with a first counterweight rope pulley and a  
20 second counterweight rope pulley. A second auxiliary  
rope pulley is mounted on a fixed overhead structure  
directly above the counterweight. The rope is passed  
from the first counterweight rope pulley to the second  
counterweight rope pulley via the second auxiliary rope  
25 pulley.

In an embodiment of the elevator, the first pair of car  
rope pulleys and the second pair of car rope pulleys  
are disposed under the elevator car, the rope being  
30 thus passed by a route below the elevator car.

In an embodiment of the elevator, the first pair of car  
rope pulleys and the second pair of car rope pulleys  
are disposed on top of the elevator car, in which case  
35 the rope is passed by a route above the elevator car.

In an embodiment of the elevator, the rope is passed from a fixed overhead structure, to which its first end is attached, to the first counterweight rope pulley. From the first counterweight rope pulley, the rope is passed to the second auxiliary rope pulley. From the second auxiliary rope pulley, the rope is passed to the second counterweight rope pulley. From the second counterweight rope pulley, the rope is passed to the pulley on the traction motor, i.e. to the traction sheave. From the traction sheave, the rope is passed to the car rope pulleys of the first pair of car rope pulleys. From a pulley in the first pair of car rope pulleys, the rope is passed to the first auxiliary rope pulley. From the first auxiliary rope pulley, the rope is passed to the car rope pulleys of the second pair of car rope pulleys. From a car rope pulley in the second pair of car rope pulleys, the rope is passed to a fixed overhead structure, to which the second end of the rope is attached.

In an embodiment of the elevator, in respect of the rope pulleys of the second pair of car rope pulleys, the speed ratio between the elevator car and the counterweight is 1:1.

In an embodiment of the elevator, the first end of the rope, the second end of the rope, the first auxiliary rope pulley, the second auxiliary rope pulley and/or the traction motor are mounted on guide rails. The guide rails are preferably planted on the bottom of the elevator shaft to pass the vertical forces down to the groundwork. Passing the vertical forces via the guide rails down to the groundwork provides an advantage as it makes the elevator independent of the wall structures of the building, which is a great advantage especially in feeble-constructed buildings, such as industrial sheds.

In the following, the invention will be described in detail by the aid of a few examples of its embodiments by referring to the attached drawings, wherein

5

Fig. 1 presents a diagram representing a first embodiment of the traction sheave elevator of the invention, seen in perspective view obliquely from above,

10 Fig. 2 presents a diagram representing a second embodiment of the traction sheave elevator of the invention, seen in perspective view obliquely from above.

Fig. 1 shows a so-called traction sheave elevator, which can be used as a low-speed freight elevator. The elevator car 2 has been arranged to move along guide rails A in the elevator shaft 1. Likewise, the counterweight 3 has been arranged to move along its own guide rails B in the elevator shaft. Both the elevator car 2 and the counterweight are carried by the same rope 4. For the sake of clarity, the figures show only one rope, but of course the rope may comprise a rope bundle or a number of adjacent ropes, as is customary in elevator technology. Similarly, the figure shows simple grooved rope pulleys, but it is clear that when several adjacent ropes are used, the pulleys must have a corresponding number of grooves or several pulleys are used side by side. The diverting pulleys may have grooves of semicircular cross-section and the traction sheave may have undercut grooves to increase friction.

As shown in Fig. 1, both ends 16 and 17 of the rope 4 are anchored in a fixed overhead structure 5 in the building. The rope 4 is passed over a number of rope pulleys 6 - 14. The counterweight rope pulleys 12 and 13 are connected to the counterweight 3. The first auxiliary rope pulley 11 and the second auxiliary rope

pulley 14 are connected to the fixed overhead structure 5. Car rope pulleys 6, 7, 9 and 10 are connected to the elevator car 2. The traction motor 15 has been arranged to drive one of the rope pulleys 8. The fixed overhead structure 5 to which the ends 16 and 17 of the rope 4 and the auxiliary rope pulleys 11 and 14 are attached may be e.g. the ceiling of the elevator shaft or e.g. guide rail A and/or B. In the embodiment illustrated by Fig. 1, the ends 16 and 17 of the rope 4 and the auxiliary rope pulleys 11 and 14 are fixed to the guide rails, which is an advantageous arrangement because it makes the elevator independent of the wall structures of the building and allows the use of feeble-constructed walls. Large vertical forces can be transmitted down to the groundwork while lateral forces are transmitted via the guide rail fixtures to the walls of the elevator shaft or to similar structures.

The traction motor 15 is a synchronous motor with permanent magnets, and the drive pulley 8 is integrated with its rotor. The motor is mounted in the elevator shaft 1 and attached to the upper part of a guide rail A.

The elevator car 2 is provided with two pairs of car rope pulleys, a first pair of car rope pulleys 6, 7, in which the car rope pulleys 6 and 7 are placed at a distance from each other near the opposite lower edges of the bottom of the elevator car, and a second pair of car rope pulleys 9, 10, in which the car rope pulleys 9 and 10 are correspondingly placed at a distance from each other near the opposite lower edges of the bottom of the elevator car. The first pair of car rope pulleys 6, 7 and the second pair of car rope pulleys 9, 10 are substantially symmetrically disposed on either side of the centre line of the elevator car 2, thus providing a stable suspension with widely spaced supporting points,

distributing the load over a large area in the elevator car.

The rope 4 is passed from a car rope pulley 7 of the first pair of car rope pulleys 6, 7 via auxiliary rope pulley 11 in the fixed overhead structure 5 to a car rope pulley 10 of the second pair of car rope pulleys 9, 10 on the elevator car 2. The second pair of car rope pulleys 9, 10 is at a distance from the first pair of car rope pulleys 6, 7 so that the rope portion running via the first pair of car rope pulleys 6, 7 under the elevator car 2 is substantially parallel with the rope portion running via the second pair of car rope pulleys 9, 10 under the elevator car 2. The running direction of the rope 4 between the car rope pulleys 6 and 7 in the first pair of car rope pulleys is opposite to the running direction of the rope portion between the car rope pulleys 9 and 10 in the second pair of car rope pulleys.

20

In the embodiment illustrated by Fig. 2, the only difference as compared with the embodiment in Fig. 1 is that the first pair of car rope pulleys 6, 7 and the second pair of car rope pulleys 9, 10 are disposed on the top side of the elevator car 2. The rope 4 is therefore passed twice by the top side of the elevator car 2 and the elevator car 2 is suspended from the rope.

Referring further to Fig. 1, the counterweight 3 is provided with a first counterweight rope pulley 12 and a second counterweight rope pulley 13, which are connected to the counterweight so that their planes of rotation are substantially in the same vertical plane, in other words, so that the axes of rotation of the pulleys 12 and 13 are parallel to each other. Connected to a fixed overhead structure 5 at about the same plane

with the counterweight 3 is a second auxiliary rope pulley 14. The rope 4 is passed from the first counterweight rope pulley 12 via the second auxiliary rope pulley 14 to the second counterweight rope pulley 13.  
5 The speed ratio between the elevator car 2 and the counterweight 3 is thus 1:1.

In the embodiments in Fig. 1 and 2, the first end 16 of the rope 4 is attached to a fixed overhead structure 5  
10 in the upper part of the elevator shaft 1. From the fixed overhead structure 5, the rope 4 is passed via the first counterweight rope pulley 12 to the second auxiliary rope pulley 14. Via the second auxiliary rope pulley 14, the rope is passed to the second counterweight rope pulley 13 and via it further over the rope  
15 pulley 8 of the traction motor 15 via the rope pulleys of the first pair of car rope pulleys 6, 7 and over the first auxiliary rope pulley 11 via the rope pulleys of the second pair of car rope pulleys 9, 10 to the fixed  
20 overhead structure 5, to which the second end 17 of the rope 4 is attached.

In some elevators, when the elevator is being loaded with heavy cargo or for other reasons, it may be necessary to prevent rope movement between the rope loops  
25 supporting the elevator car. Rope movement during loading can be prevented by using a brake acting on the rope or on a rope pulley mounted on the elevator car or on an auxiliary rope pulley 11. An advantageous stabilisation of the elevator car, effective even during operation, is achieved via appropriate placement of the drive machine. By placing the elevator drive machine together with the traction sheave in the position reserved for auxiliary rope pulley 11 in the embodiments  
30 in Fig. 1 and 2, an advantageous configuration in respect of stability of the elevator car is achieved. In this case, the traction sheave, in which the friction

between the rope and the rope grooves is often higher than in the other pulleys and in which the rotary motion driving or braking the elevator rope is dependent on the operation of the drive machine, functions as an  
5 element holding back the rope between the rope portions supporting the elevator car, i.e. between the rope portion going from the traction sheave towards the counterweight and the rope portion going from the traction sheave in the opposite direction relative to the length  
10 of the rope.

The invention is not restricted to the examples of its embodiments described above, but many variations are possible within the scope of the inventive idea defined  
15 by the claims.

## CLAIMS

1. Traction sheave elevator, comprising

- an elevator car (2), which has been arranged to move  
5 along a guide track (A) in the elevator shaft (1);
- a counterweight (3), which has been arranged to move  
along a guide track (B) in the elevator shaft (1);
- a rope (4), both ends of which are attached to a  
10 fixed overhead structure (5) in the upper part of the  
elevator shaft, the elevator car and the counter-  
weight being carried by said rope;
- a number of rope pulleys (6 - 14), one of which is a  
traction sheave while the others are diverting pul-  
leys and via which the rope is passed and which rope  
15 pulleys are connected to the counterweight (3), to a  
fixed overhead structure (5) in the upper part of the  
elevator shaft (1) and to the elevator car (2), which  
is provided with a first pair of car rope pulleys (6,  
7) in which the car rope, pulleys (6 and 7) are  
20 mounted on the elevator car at a distance from each  
other; and
- a traction motor (15) arranged to drive the traction  
sheave (8),

characterised in that the traction sheave elevator com-  
25 prises a second pair of car rope pulleys (9, 10) con-  
nected to the elevator car, in which the car rope pul-  
leys (9 and 10) are placed at a distance from each  
other, and an auxiliary rope pulley (11) connected to  
the fixed overhead structure (5); and that the rope (4)  
30 is passed from a car rope pulley (7) of the first pair  
of car rope pulleys (6, 7) via the auxiliary rope pul-  
ley (11) mounted on the fixed overhead structure to a  
car rope pulley (10) of the second pair of car rope  
pulleys (9, 10).

35

2. Elevator as defined in claim 1, characterised in  
that the second pair of car rope pulleys (9, 10) is at



a distance from the first pair of car rope pulleys (6, 7) so that the rope portion passing via the first pair of car rope pulleys is substantially parallel to the rope portion passing via the second pair of car rope pulleys.

3. Elevator as defined in claim 2, characterised in that the first pair of car rope pulleys (6, 7) and the second pair of car rope pulleys (9, 10) are symmetrically disposed on either side of the centre line of the elevator car.

4. Elevator as defined in any one of claims 1 - 3, characterised in that it comprises a first counterweight rope pulley (12) and a second counterweight rope pulley (13), both connected to the counterweight (3); that a second auxiliary rope pulley (14) is mounted on the fixed overhead structure (5) directly above the counterweight; and that the rope (4) is passed from the first counterweight rope pulley (12) to the second counterweight rope pulley (13) via the second auxiliary rope pulley (14).

5. Elevator as defined in any one of claims 1 - 4, characterised in that the first pair of car rope pulleys (6, 7) and the second pair of car rope pulleys (9, 10) are disposed under the elevator car (2), the rope (4) being thus passed by a route below the elevator car.

6. Elevator as defined in any one of claims 1 - 5, characterised in that the first pair of car rope pulleys (6, 7) and the second pair of car rope pulleys (9, 10) are disposed on top of the elevator car, in which case the rope (4) is passed by the top side of the elevator car (2).

7. Elevator as defined in any one of claims 1 - 6, characterised in that the rope (4) is passed from the fixed overhead structure (5) via the first counterweight rope pulley (12) to the second auxiliary rope pulley (14) and further to the second counterweight rope pulley (13) and from there further to the traction sheave (8) of the traction motor (6), from which it is further passed via the car rope pulleys of the first pair of car rope pulleys (6, 7) to the first auxiliary rope pulley (11) and from there further via the car rope pulleys of the second pair of car rope pulleys (9, 10) to the fixed overhead structure (5).

8. Elevator as defined in any one of claims 1 - 7, characterised in that the speed ratio between the elevator car (2) and the counterweight (3) is 1:1.

9. Elevator as defined in any one of claims 1 - 8, characterised in that the first end (16) of the rope (4), the second end (17) of the rope, the first auxiliary rope pulley (11), the second auxiliary rope pulley (14) and/or the traction motor (15) are mounted on guide rails (A, B).

10. Elevator as defined in any one of claims 1 - 9, characterised in that the guide rails (A, B) are planted on the bottom of the elevator shaft (1) to pass the vertical forces down to the groundwork.

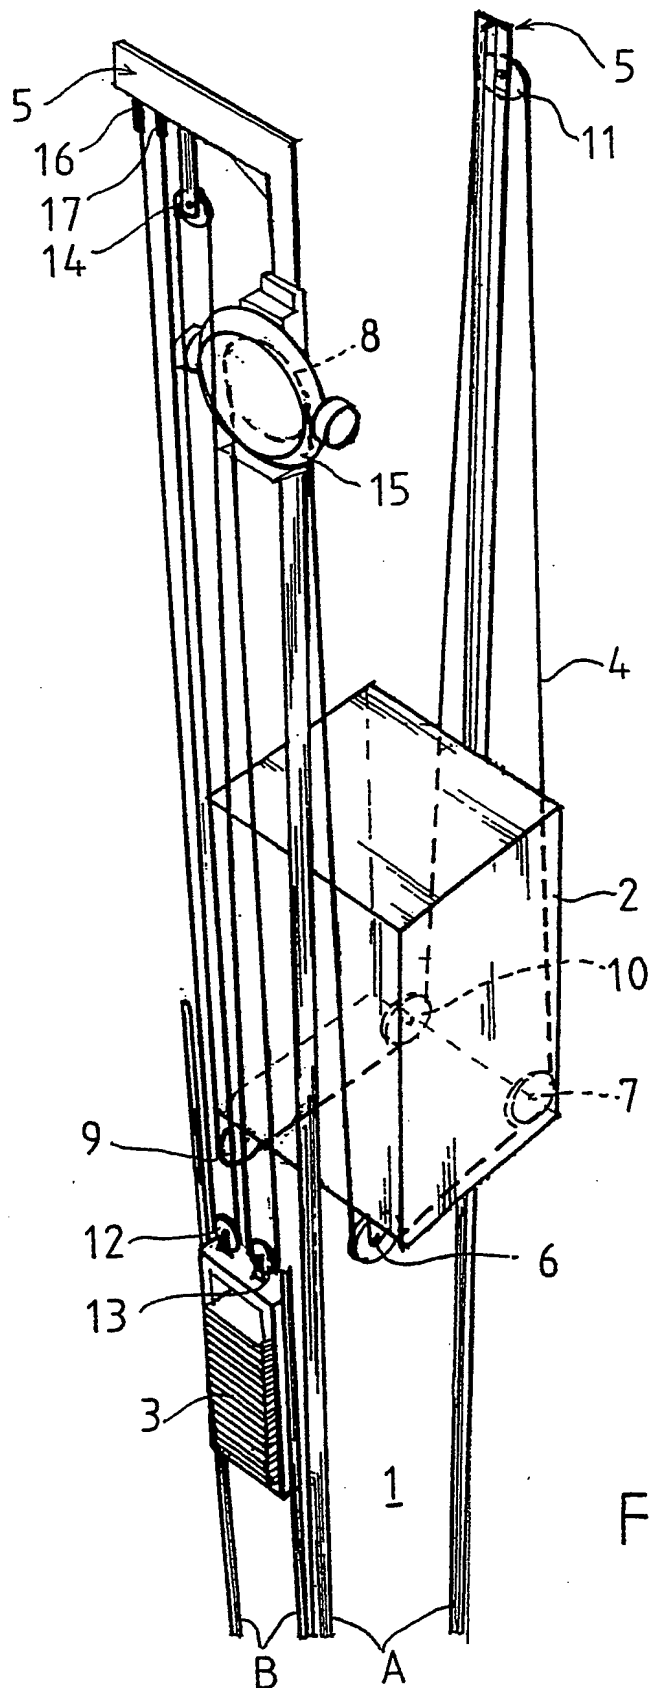


Fig. 1

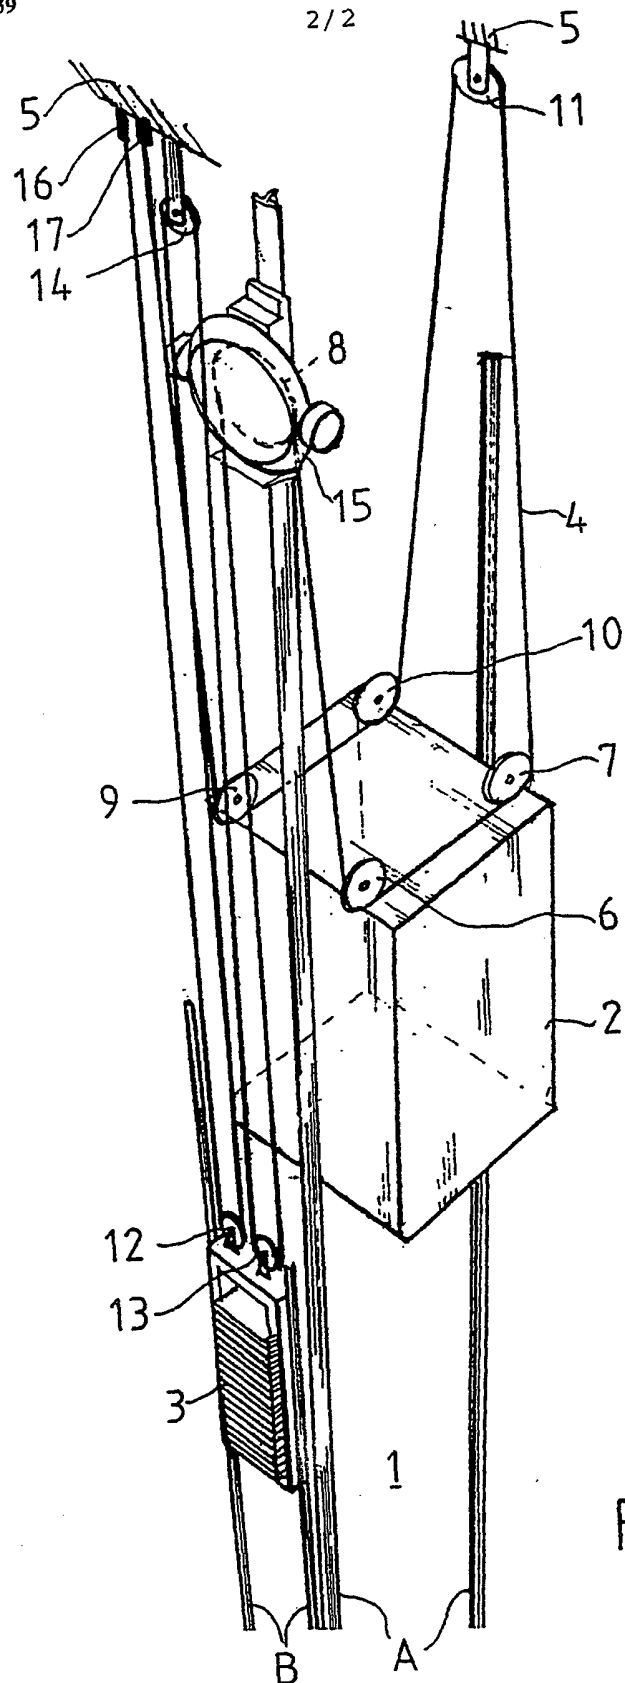


Fig. 2